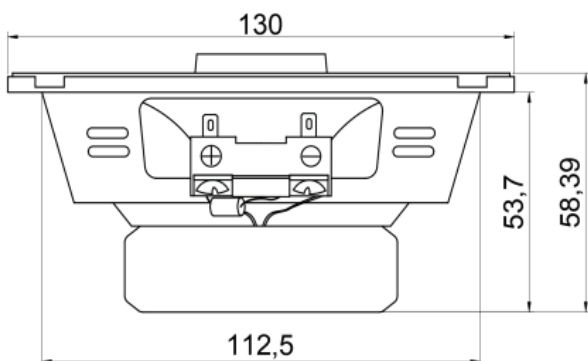
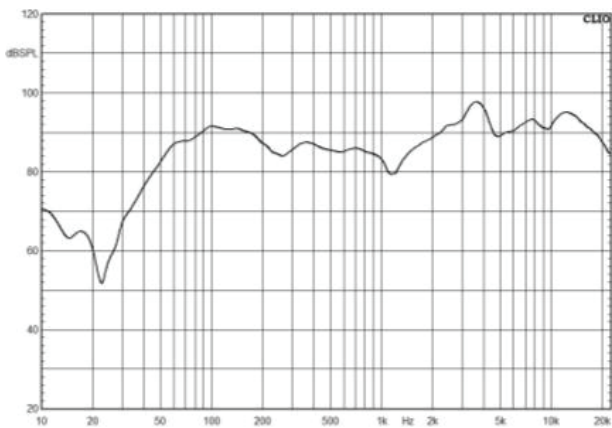


SPECIFICATIONS

General Data		Unit	Features
Overall Dimensions	130*58.4	mm	5" COAXIAL SPEAKER
Nominal Power Handing	40	W	BLACK PP CONE WITH RUBBER EDGE
Maximum Power	130	W	IMPEDANCE:4 Ω
Sensitivity	93±2	dB	RATED POWER:40 W
Frequency Response	70-20K	Hz	MAX. POWER:130 W
Cone Material	PP		FREQUENCY RESPONSE:70-20K HZ
Basket	METAL		SENSITIVITY:93±2 DB
Net Weight	0,55	kg	Dimensions
Electrical Data			
Nominal Impedance	4	Ohm	
DC Resistance	3,2	Ohm	
Voice Coil and Magnet Parameters			
Voice Coil Diameter	Φ25.5	mm	
Voice coil wire	SV		
Voice Coil Height	8,5	mm	
Magnetic Gap Height	4	mm	
Magnet system type	High Flux Ferrite		
Voice Coil Bobbin	KAPTON		
Number of Layers	2L		
T-S Parameters			
Suspension Compliance	0,5084	Cms	
Mechanical Q Factor	8,69	Qms	
Electrical Q Factor	1,9700	Qes	
Total Q Factor	1,6	Qts	
Moving Mass	8,4241	Mms	
Eq. Cas AIR Loaded	5,3229	Vas	
Resonant Frequency	76,9	Fs	
Effective Piston Area	8,66E+01	SD	