


OWNER'S MANUAL


2.5" SUBWOOFER

RS-HAZELNUT

4Ω

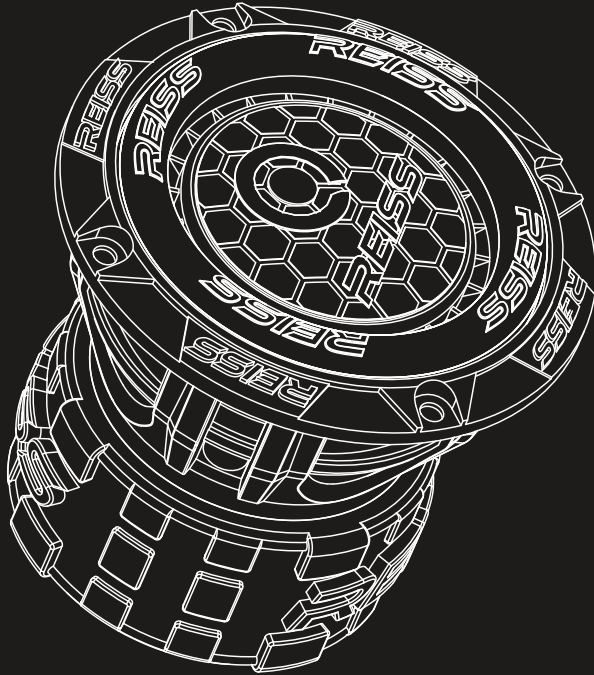

Since 1985
TURKISH ENGINEERING

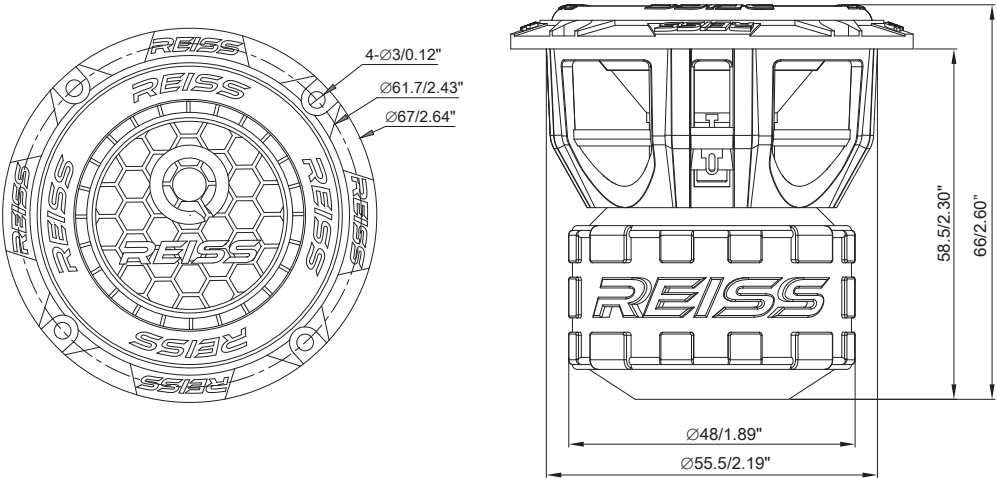

MEASUREMENT

Overall Diameter	67mm / 2.64"
Overall Depth	66mm / 2.6"
Front Mount Baffle Cutout.....	55.5mm /2.19"
Mounting Depth.....	58.5mm / 2.3"
Motor Diameter.....	48mm / 1.89"

THIELE & SMALL PARAMETERS


Equivalent Volume	Vas	0.0405L / 0.00143ft3
Free Air Resonance	Fs	248.29Hz
Mechanical Factor	Qms	6.49
Electrical Factor	Qes	7.16
Total Factor	Qts	3.4
Moving Mass	Mms	4.45g
Compliance	Cms	90 µm/N
BL Factor	BL	1.87TM
Voice Coil Inductance	Le	600µH
Diaphragm Area	Sd	17.72 CM2
DC Resistance	Re	3.2 OHM

SPECIFICATIONS

Nominal Diameter.....	67mm / 2.5"
Nominal Impedance.....	4 OHMS
RMS Power Handling.....	50 Watts
MAX Power Handling.....	100 Watts
Sensitivity(1w/1m).....	82 dB
Frequency Response.....	220Hz - 6000Hz
Recommended Lo Pass Crossover.....	220Hz

MOTOR

Voice Coil Diameter.....	19.45mm / 0.77"
Voice Coil Former Material.....	Kapton
Winding Material.....	CCAW
Cone Material.....	PP
Dustcap Material.....	PP
Surround Material.....	Rubber
Basket Material.....	Aluminium
Basket Color.....	Red Diamond Cut
Magnet Material.....	Ferrite
Magnet Weight.....	3.5oz

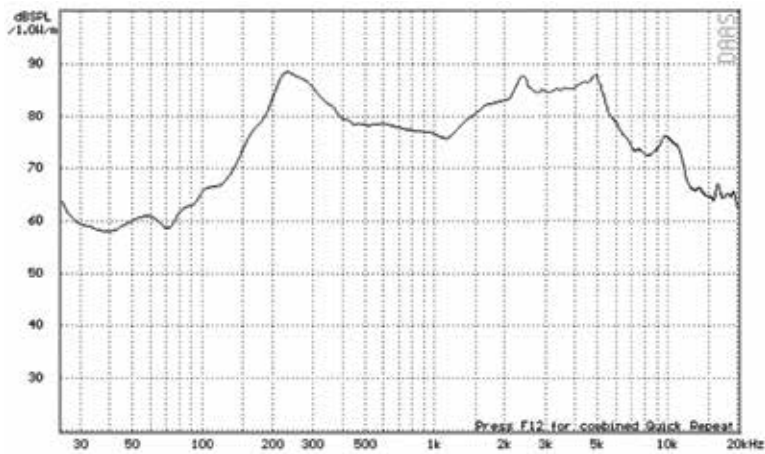



**FOR MORE INFORMATION
PLEASE VISIT**

Join Our Community



www.reissaudio.com.tr