


Model: RS-M65EX

17CM Mid-Range Speaker

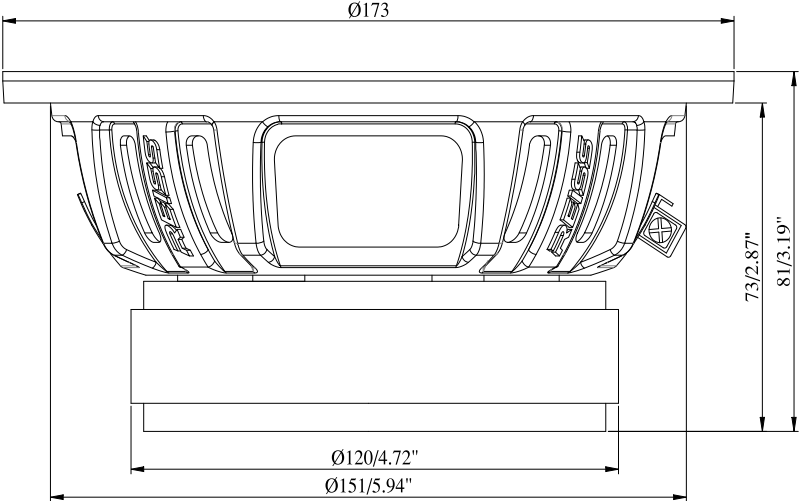

SPECIFICATIONS

General Data			Unit	FEATURES
Overall Dimensions	Ø173 x 81	mm		Steel Basket
Nominal Power Handling	180W	W		Pressed Paper Cone, Treated Cloth Surround
Maximum Power	360W	W		Dome Paper Dustcap
Sensitivity	95	dB		High Temperature CCAW Voice Coil
Frequency Response	110~15000	Hz		Ferrite Magnet Structure
Cone Material	Pressed Paper			Dimensions 
Basket	Steel			
Net Weight	2.3	kg		
Electrical Data				
Nominal Impedance	4	Ohm		
DC Resistance	3.2	Ohm		
Voice Coil and Magnet Parameters				ESC End D A S Frequency Response Distance Loudsp.- Mic.: 17.0cm dB SPL normalised on 1 Meter  Press F12 for combined Quick Repeat
Voice Coil Diameter	38.6	mm		
Voice Coil Height	8	mm		
Magnetic Gap Height	6	mm		
Voice Coil Robbin	Kapton			
Number of Layers	2L			T-S Parameters
Suspension Compliance	214.127µM/N	Cms		
Mechanical Q Factor	5.488	Qms		
Electrical Q Factor	0.531	Qes		
Total Q Factor	0.484	Qts		
Moving Mass	7.346g	Mms		Eq. Cas AIR Loaded 7.726L Vas
Resonant Frequency	126.901Hz	Fs		
Effective Piston Area	159.40cm²	SD		