
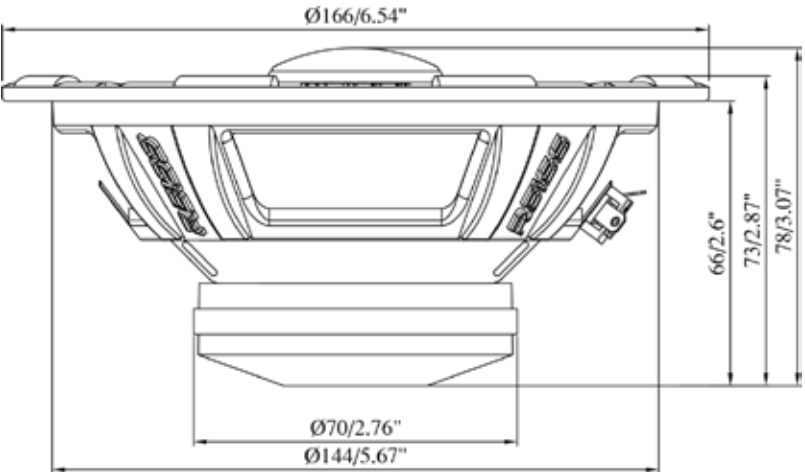


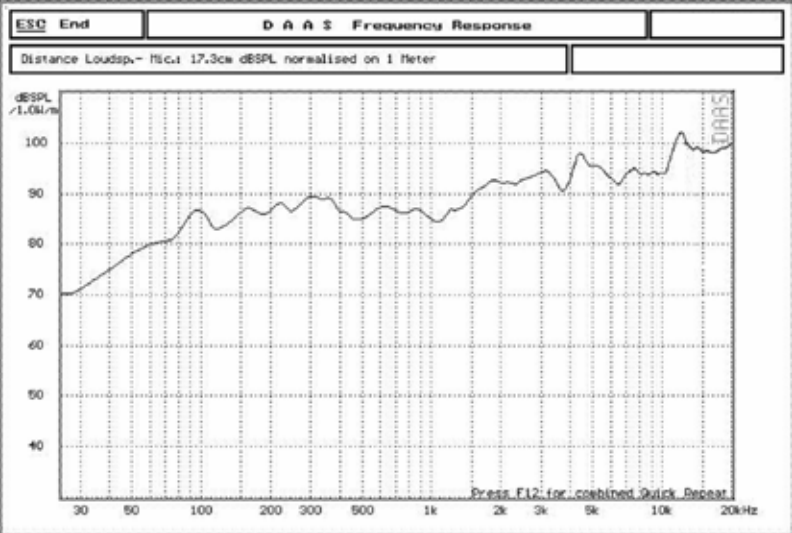

Model: RS-M6WK
16CM COAXIAL SPEAKER
1.2" Voice Coil / 4Ω

SPECIFICATIONS

General Data			Unit	FEATURES
Overall Dimensions	Ø 166 x 78	mm		Steel Basket
Nominal Power Handling	150	W		Paper Cone With Rubber Surround
Maximum Power	300	W		High Temperature 1.2" Aluminium Voice Coil
Sensitivity	92	dB		High Performance Neodymium Magnet
Frequency Response	80-20000	Hz		1" Voice Coil, PEI Diaphragm Tweeter
Cone Material	Paper			Dimensions 
Basket	Steel			
Net Weight	0.73	kg		
Electrical Data				
Nominal Impedance	4	Ohm		
DC Resistance	3.2	Ohm		
Voice Coil and Magnet Parameters				
Voice Coil Diameter	30.5	mm		
Voice Coil Height	10	mm		
Magnetic Gap Height	5	mm		
Voice Coil Bobbin	Aluminium			
Number of Layers	2L			
T-S Parameters				
Suspension Compliance	327.72 µM/N	Cms		
Mechanical Q Factor	3.097	Qms		
Electrical Q Factor	0.438	Qes		
Total Q Factor	0.384	Qts		
Moving Mass	11.832 g	Mms		
Eq. Cas AIR Loaded	9.255 Ltr	Vas		
Resonant Frequency	80.825 Hz	Fs		
Effective Piston Area	14.103cm²	SD		