




OWNER'S MANUAL
4" NEODYMIUM COAXIAL SPEAKER
RS-V4BW
4Ω

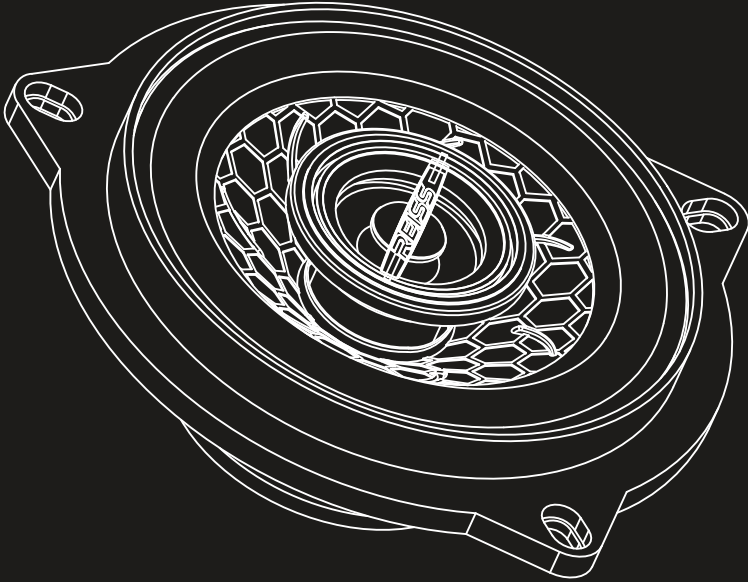

Since 1985
TURKISH ENGINEERING

RS-V4BW

SPECIFICATIONS

Nominal Diameter	4" / 102mm
Nominal Impedance	4 OHMS
RMS Power Handling	100 Watts
MAX Power Handling.....	200 Watts
Sensitivity(1w/1m).....	91dB
Frequency Response.....	130~20KHZ
Recommended Lo Pass Crossover	130HZ
Pair or Single.....	Pair

MOTOR


Voice Coil Diameter.....	1" / 25.9mm
Voice Coil Former.....	Aluminium
Winding Material.....	Copper
Surround Material.....	Rubber
Magnet Material.....	Neodymium
Magnet Weight.....	2.73oz
Basket Material	Plastic
Basket Color / Finish.....	Black

THIELE & SMALL PARAMETERS



Vas.....	1.33L
Xmax.....	4mm
Fs.....	138.448Hz
Qms.....	3.33
Qes.....	0.435
Qts.....	0.385
Mms.....	4.334.g
Cms.....	304.948µM/N
BL.....	5.664 TM
Le.....	166.647uH
Sd.....	55.4cm2
Re.....	3.2 Ohms

MEASUREMENTS

Overall Diameter.....	118.6mm/4.67"
Overall Depth.....	51mm/2"
Front Mount Baffle Cutout.....	150mm/5.91"
Mounting Depth.....	82mm/3.23"
Motor Diameter.....	60mm/2.36"

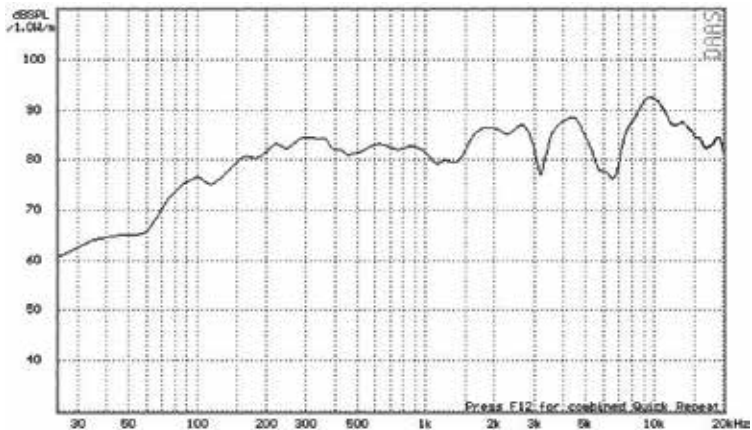

MEASUREMENTS

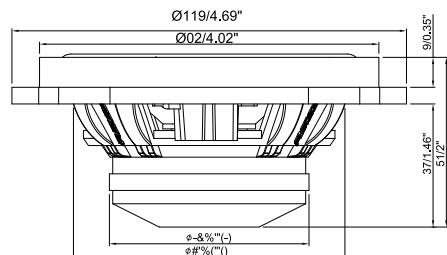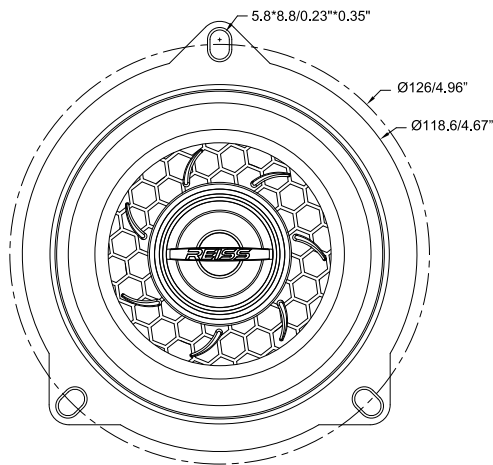



**FOR MORE INFORMATION
PLEASE VISIT**

Join Our Community



www.reissaudio.com.tr