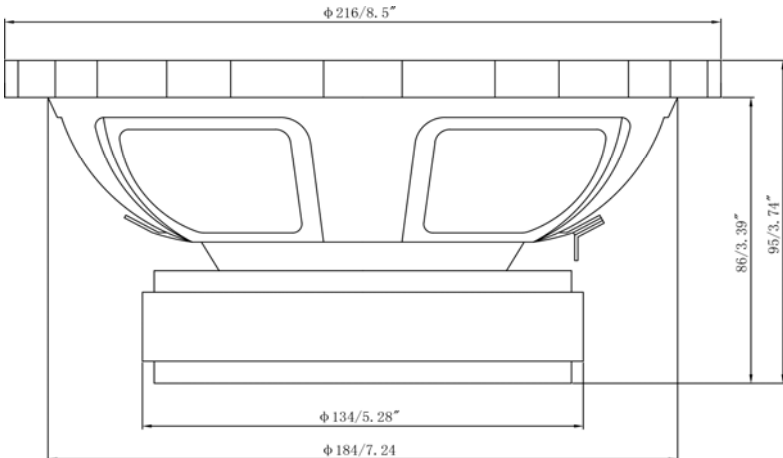
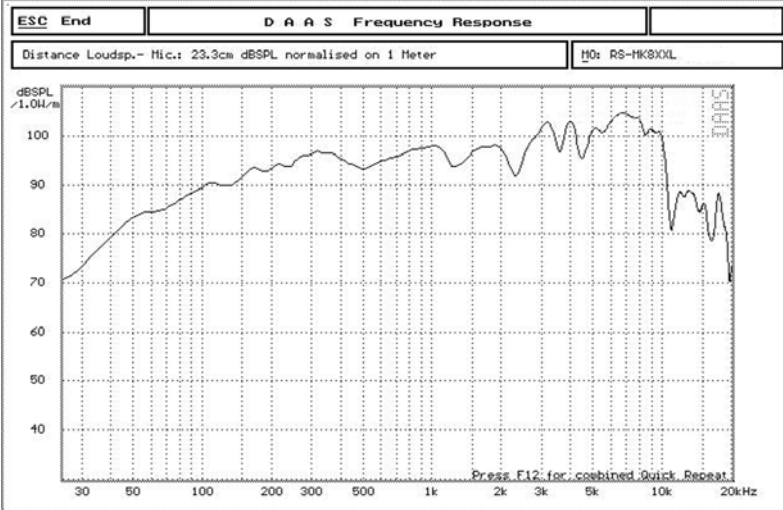


Model: RS-MK8XXL					
20CM Mid-Range Speaker					
SPECIFICATIONS					
General Data		Unit	FEATURES		
Overall Dimensions	Ø209x97	mm	Steel Basket		
Nominal Power Handling	150	W	Reinforced Pulp Paper Cone, Treated Cloth Surround		
Maximum Power	400	W	Built in Aluminium Bullet		
Sensitivity	95	dB	High Temperature 1.75inch Voice Coil		
Frequency Response	95~15000	Hz	High Performance Ferrite Magnet Structure		
Cone Material	Pulp Paper		Dimensions		
Basket	Steel				
Net Weight	2.96	kg			
Electrical Data					
Nominal Impedance	4	Ohm			
DC Resistance	3.2	Ohm			
Voice Coil and Magnet Parameters					
Voice Coil Diameter	44.7	mm			
Voice Coil Height	8	mm			
Magnetic Gap Height	6	mm			
Voice Coil Robbin	Kapton				
Number of Layers	2L				
T-S Parameters					
Suspension Compliance	173.050µM/N	Cms			
Mechanical Q Factor	8.386	Qms			
Electrical Q Factor	0.517	Qes			
Total Q Factor	0.487	Qts			
Moving Mass	12.956	Mms			
Eq. Cas AIR Loaded	10.954L	Vas			
Resonant Frequency	102	Fs			
Effective Piston Area	211.13cm ²	SD			